


# Insulators up to 1.5 kV DC

Type: FT1.5

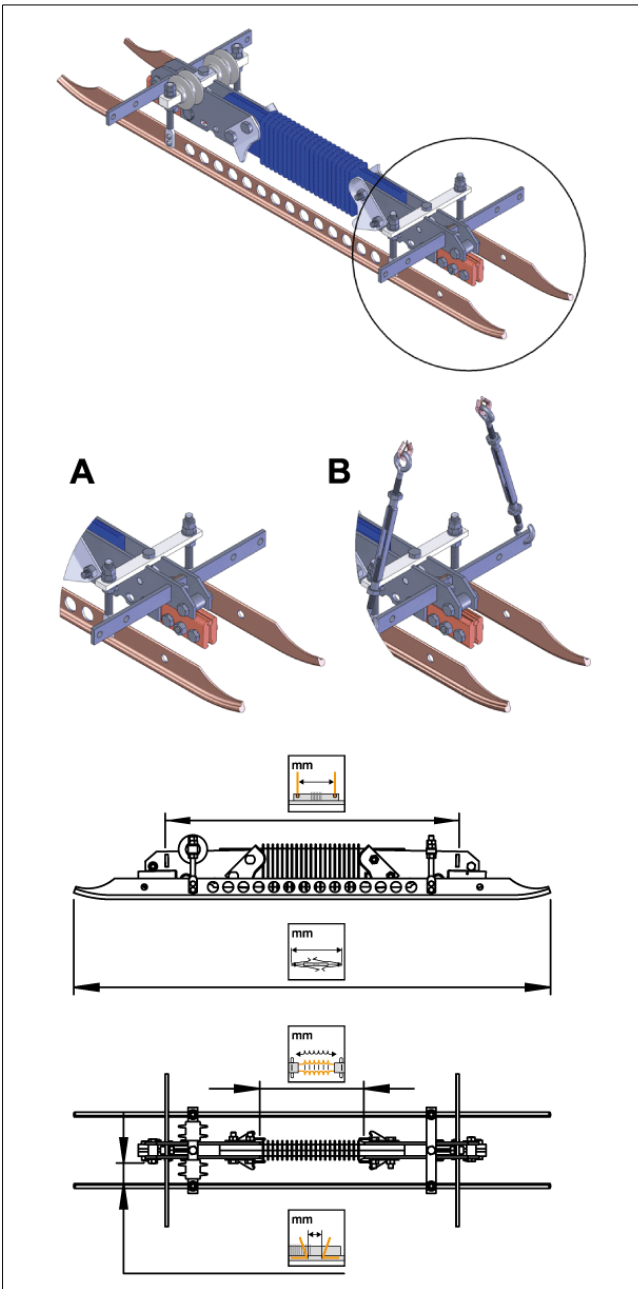

### Material

GRP/Silicone rubber, Cu, CuNiSi, stainless steel

### Application

1.5 kV DC section insulator for tramways.

For speed up to 80 km/h.

SML insulator beam 80 kN.

### Remark

A) Without turnbuckles

B) With turnbuckles

1) without setting part

2) with setting part

Item-no.



Item-no.	mm <sup>2</sup>	mm	kN	mm	mm	mm	mm	Kg	
655.300.025	80-150	5.6-6.9	max. 32	450	610	35	1000	11.8	B, 2
655.321.500	80-150	5.6-6.9	max. 10	450	610	35	1000	11	A, 1
655.300.014	80-150	5.6-6.9	max. 10	450	610	35	1000	11.5	B, 1